




Tunnel TM4310

TYPE	Rack conveyor dishwashers
LINE	TUNNEL LINE
BASKET	500x500
SIZE	3119x813x1825h



The TUNNEL Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. TUNNEL is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.



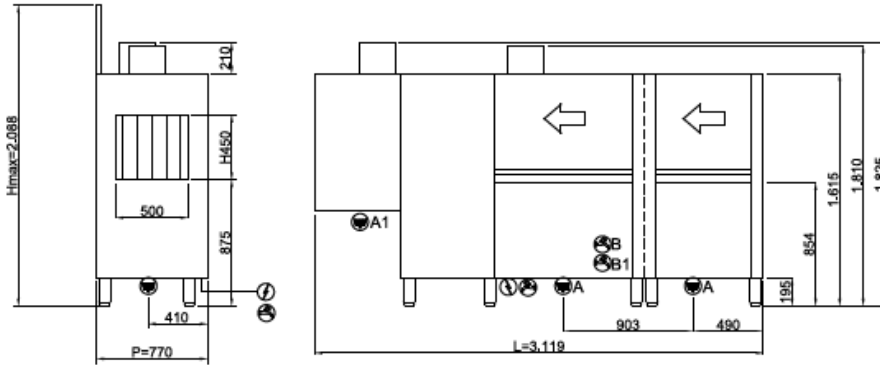

400V3N+T 32,80kW
(CABLE NOT PROVIDED)

G 3/4" M
B: 55°C
B1: 10°C
L=1500

A: Ø1"1/2 M
A1: Ø31 M
L=1500

DISHWASHERS FEATURES TM4310

Dimensions - (mm) L - P - H	3119x813x1825h
Basket dimensions	500x500
n° baskets/hour	135/200/270
Passage height max (cm)	450
Total power input	32,8
Standard input voltage	400V3N+T 50 Hz
PRELAVAGGIO	
Tank capacity	69
Tank Resistance	10,5
PRIMO_LAVAGGIO	
Tank capacity	69
Tank Resistance	10,5
LAVAGGIO	
Tank capacity	69
Tank Resistance	10,5
PRE_RISCIACQUO	
Tank capacity	69
RISCIACQUO	
Break-Tank and rinse pump	200W
Boiler heating	12,0
Water consumption	~230
Temperatura Acqua di Alimentazione	+15°C
Minimum water pressure	1,5
Water hardness	7÷10 °f
ASCIUGATURA	
ventilatore	0,55
Capacity	~70
resistenza	6,0
RECUPERATORE_TERMICO_CALORE	



Exhauster	0,20
Capacity	~70
CORREDO_STANDARD	
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2
4 division cutlery insert	1
ACCESSORIES	
Drying	●
recuperatore_termico_di_calore	●
Pressure reducer with pressure gauge	●
Corner pre-washing system	●
Internal detergent & rinse-aid dosing unit	●
Triple tank filter and stainless steel drawer	●
● = INSTALLABLE ACCESSORY , - = NOT INSTALLABLE ACCESSORY	

